

Product Data Sheet



Type/Item No: RLED13TL

Features:


High Output COB LED 1x13w 12v DC -240AC with an operating current of 280Ma and supplied c/w LED driver. Designed beam angle of 60deg offers excellent coverage and distribution. The body is manufactured from aluminium and the finish is white. Average life span 50000hrs* L70. Standard colour is Warm white. No heat concerns with specially designed ribbed diecast heat sink assembly fitted to the back designed as an active cooling system. Short circuit and thermal protection. Downlight should be located in a well ventilated area.

Available
IES files, LM79, LM80

Optional
Leading Edge & Dali dimming

Optional: IP44

Class:	IP:	Colour:
11	20	White

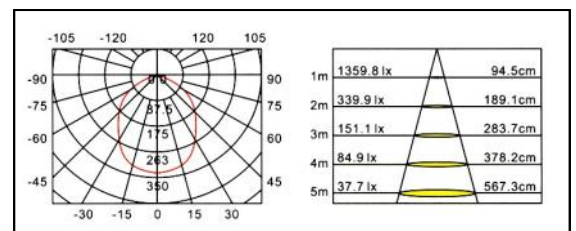

Light Source:

1x13w Sharp COB LED

Control Equipment:



Australian Approved; LED Driver
COMPLIANCES:

Magnetic Emission	EN55015
Harmonic	EN61000-3-2
Flicker	EN61000-3-3
Immunity	EN61547
Safety	EN61347-1
Tested to IEC	61347-2-13(LED control gear)


SAA certificate SAA130860EA
EMC Compliant

Lamp Performance

	W/White
Luminous Flux	947lm
Luminous Efficacy	75lm/w
Colour Temperature	3000K
Beam Angle	60deg
PF	>.90
Current	0.059A
CRI	82

Dimensions:

As Shown



Cut Out 90mm

* Based on 8 hours per day, 7 days per week