

Product Data Sheet



Type/Item No: **COB20** **COB24**

Features:

- Retro fit into ES lampholders
- High output LED
- SAA certification
- 3-5 times energy saving
- IP64
- Flame retardant material
- Operating temperature +45Deg - 25Deg
- 360Deg spread beam angle
- Frosted lens
- 40,000 hrs rated life
- Passive cooling design
- Easy replacement



Class: IP: Colour:

1 64 White

COB20.3	3000K	1650lm
COB20.6	6000K	1950lm
COB24.3	3000K	2700lm
COB24.6	6000K	3100lm

Light Source:


LG SMD5630 @130lm/w

Control Equipment:



COMPLIANCES:
Magnetic Emission EN55015
Harmonic EN61000-3-2
Flicker EN61000-3-3
Immunity EN61547
Safety EN61347-1
Tested to IEC 61347-2-13(LED control gear)

SAA certificate no: SAA161411

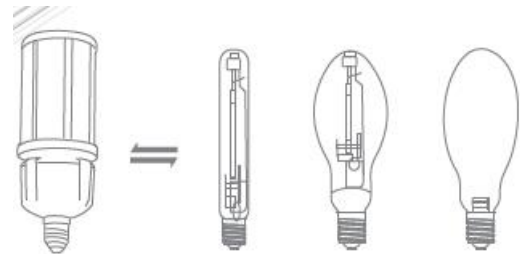

Dimensions:

As Shown

COB20 155mm x 64mm
COB24 170mm x 64mm