

Product Data Sheet



Type/Item No: **COB20** **COB36**

Features:

- Retro fit into ES lampholders
- High output LED
- SAA certification
- 3-5 times energy saving
- IP64
- Flame retardant material
- Operating temperature +45Deg - 25Deg
- 360Deg spread beam angle
- Frosted lens
- 40,000 hrs rated life
- Passive cooling design
- Easy replacement



Class:	IP:	Colour:
1	64	White

Light Source:

LG SMD5630 @130lm/w

COB20.6	6000K	1950lm
COB36.6	6000K	4810lm

Control Equipment:




COMPLIANCES:	
Magnetic Emission	EN55015
Harmonic	EN61000-3-2
Flicker	EN61000-3-3
Immunity	EN61547
Safety	EN61347-1
Tested to IEC	61347-2-13(LED control gear)

SAA certificate no: SAA161411

Dimensions:

As Shown

COB20	155mm x 64mm
COB36	230mm x 87mm

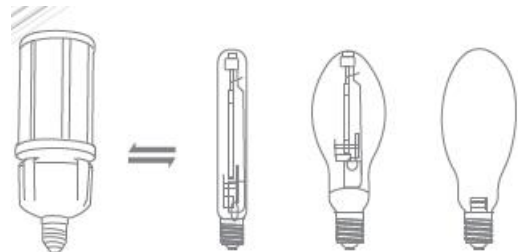

NOTE: When replacing Mercury Vapour, Metal Halide or High Pressure Sodium lamps, the control gear must be disconnected. The lampholder must be wired directly to the main power supply